

JMC1 Fig. 3. The lower solid curve shows the effective refractive index, which exhibits dispersive effects due to scattering. The error bars represent the uncertainties associated with repeated measurements. The upper portion of the figure shows the measured index of solid teflon, which is not dispersive.

References

1. A. Ishimaru, *Wave propagation and scattering in random media* (Academic Press, New York, 1978).
2. D.S. Wiersma, P. Bartolini, A. Lagendijk, and R. Righini, *Nature* **390**, 671 (1997).
3. R. Graaff and J.J.T. Bosch, *Opt. Lett.* **25**, 43 (2000).
4. R.H.J. Kop, P. de Vries, R. Sprik, and A. Lagendijk, *Phys. Rev. Lett.* **79** 4369 (1997).
5. A.A. Chabanov and A.Z. Genack, *Phys. Rev. E* **56**, 1338 (1997).

Therefore, the information at certain time is encoded at a corresponding frequency. By dispersing the probe beam in the frequency domain, the encoded information can be extracted.² The full THz waveform is measured simultaneously, thereby CPTI can dramatically accelerate the imaging speed.

We placed four different powdered samples: flour, salt, baking soda and seasoning inside a paper envelope and used the CPTI system to scan the envelope in x and y dimensions. This took approximately 8 minutes because we scanned the envelope in 2 dimensions. Using a 1D chirped probe pulse THz imaging system³ it is feasible to attain a potential throughput of 12 envelopes/minute. 800 milligrams of each of the sample powders were placed on double sided cello tape and attached to a piece of paper as shown in Fig. 1(a) and placed in an envelope. The envelope was imaged and the transmitted THz waveform was measured at each pixel. The Fourier transform of the THz waveform provides information on the frequency dependent scattering, absorption and refractive index of the sample. In this way the powders can be detected. Figure 1(b) shows a THz image produced by plotting the intensity of the THz pulse at a frequency of 0.3 THz, in Fig. 1(c) we have used simple classification algorithms to differentiate between the different powders. A linear discriminant classifier was trained using the responses for 100 random pixels of each powder then the whole image was classified.

To more accurately assess the applicability of THz imaging to Anthrax detection we considered samples of *Bacillus thuringiensis* (BT) bacteria. Several bacilli produce spores that are physically

and chemically very similar to those produced by *B. anthracis*, including *B. thuringiensis*, which is commonly used for insect control in gardens and is non-pathogenic to man and other mammals. Approximately 500 milligrams of *B. thuringiensis* spore flakes were placed inside an envelope and imaged using the CPTI system. Fig. 2. shows the envelope containing the BT spores and Fig. 3. shows the THz image of the envelope using the amplitude of the responses at 0.3 THz. The spores are clearly visible.

We have shown that THz imaging can detect powders inside envelopes at a concentration of 80 milligrams/cm² and that in a carefully controlled experiment classification algorithms can be used to differentiate between different types of powders. We have also presented images of bacteria spores inside envelopes and will demonstrate the performance of classification algorithms in detecting *B. thuringiensis*.

References

1. Z. Jiang and X.-C. Zhang, "Electro-optic measurement of THz field pulses with a chirped optical beam," *Applied Physics Letters* **72**(16), pp. 1945-1947, 1998.
2. F.G. Sun, Z. Jiang, and X.C. Zhang, "Analysis of terahertz pulse measurement with a chirped probe beam," *Applied Physics Letters* **73**(16), pp. 2233-2235, 1998.
3. Z. Jiang and X.-C. Zhang, "Measurement of spatio-temporal terahertz field distribution by using chirped pulse technology," *IEEE Journal of Quantum Electronics* **36**(10), pp. 1214-1222, 2000.

JMC2


4:00 pm

Powder Detection Using THz Imaging


Shaohong Wang,¹ Bradley Ferguson,^{1,2} Carmen Mannella,³ Derek Abbott,² and X.-C. Zhang,¹
¹Department of Physics, Applied Physics and Astronomy, Rensselaer Polytechnic Institute, Troy, NY 12180, USA; ²Department of Electrical & Electronic Engineering, Adelaide University, SA 5005, Australia; ³Wadsworth Center, New York State Department of Health, Albany, NY 12201, Email: zhangxc@rpi.edu

The non-destructive scanning of mail envelopes and packages is a topic of intense current interest. A large number of techniques are under investigation for the rapid screening of mail to detect illegal and/or harmful substances such as explosives, illicit drugs and bioterrorism substances such as the Anthrax causing bacterium *Bacillus anthracis*. Terahertz imaging has a number of important advantages in this application setting. Firstly paper, plastics, cardboard and many other packaging materials are largely transparent to THz radiation. Additionally, the coherent detection of THz pulses provides frequency-dependent, phase sensitive measurements of the response of the sample. This information may one day lead to a reliable method for the detection of specific substances in mail.

The chirped probe beam THz imaging system (CPTI) encodes the time varying THz information directly onto a chirped probe beam.¹ The chirped probe beam can be thought of as an optical pulse with a continuous frequency distribution, which is linear function of pulse delay.

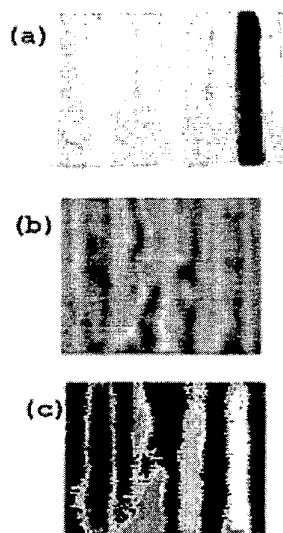

JMC2 Fig. 1. The powders used to demonstrate THz imaging. Figure (a) shows the piece of paper containing samples of salt, baking soda, flour and seasoning (from left to right). Figure (b) shows the THz image at a frequency of 0.3 THz. Figure (c) shows the results of classifying the THz data as described in the text. The image consists of five shades of gray. From darkest to lightest they correspond to paper, salt, baking soda, flour and seasoning.

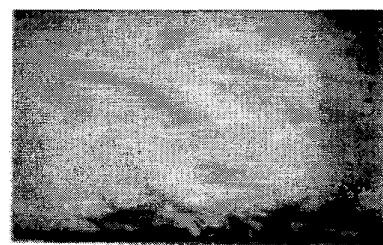

JMC2 Fig. 2. Standard optical photograph of the envelope containing the spore flakes. The envelope is backlit to allow the spore flakes to be viewed.



JMC2 Fig. 3. THz image of the envelope containing the spore flakes. The amplitude of the responses at 0.3 THz were mapped to the grayscale intensity.